



Item: _____

Quantity: _____

Project: _____

Thermostatic Griddle

Thermostatic Griddle

| | | | |
|---|---------------------------------|---------------------------------|---------------------------------|
| Models: <input type="checkbox"/> RTG-12 | <input type="checkbox"/> RTG-18 | <input type="checkbox"/> RTG-24 | <input type="checkbox"/> RTG-36 |
| <input type="checkbox"/> RTG-48 | <input type="checkbox"/> RTG-60 | <input type="checkbox"/> RTG-72 | |



RTG-36

Gas Type: Natural LP

Elevation (if above 2000 ft.): _____

Standard Features

- 11" high, Low Profile
- Large 1½ gallon capacity S/S grease can
- Compact heavy gauge chassis for long life
- Stainless steel sides and front valve cover
- Double wall panels for cooler sides
- Aeration panels between the burners for added efficiency
- Stainless Steel "U" shaped burner every 12", rated at 30,000 BTU/hr
- Energy saving thermostat is adjustable from 150°-450° F
- 1" thick griddle plate with polished cooking surface
- Thermo control to operate every burner
- 4" wide S/S grease trough with large drain opening for easy cleaning
- Stainless steel tubing for burners and pilots
- 4" high adjustable heavy duty legs included


Options and Accessories

- Grooved griddle (specify width: _____")
- Chrome griddle plate
- Stainless Steel Equipment Stand
 - Knock Down All Welded
- Size**
- 12" 18" 24" 30" 36" 48" 60" 72"
- 5" swivel casters (set of four - 2 locking)
- 5" swivel casters (set of four - 2 locking) (60" and 72" stands)



2 YEAR LIMITED, PARTS AND LABOR WARRANTY

Thermostatic Griddle

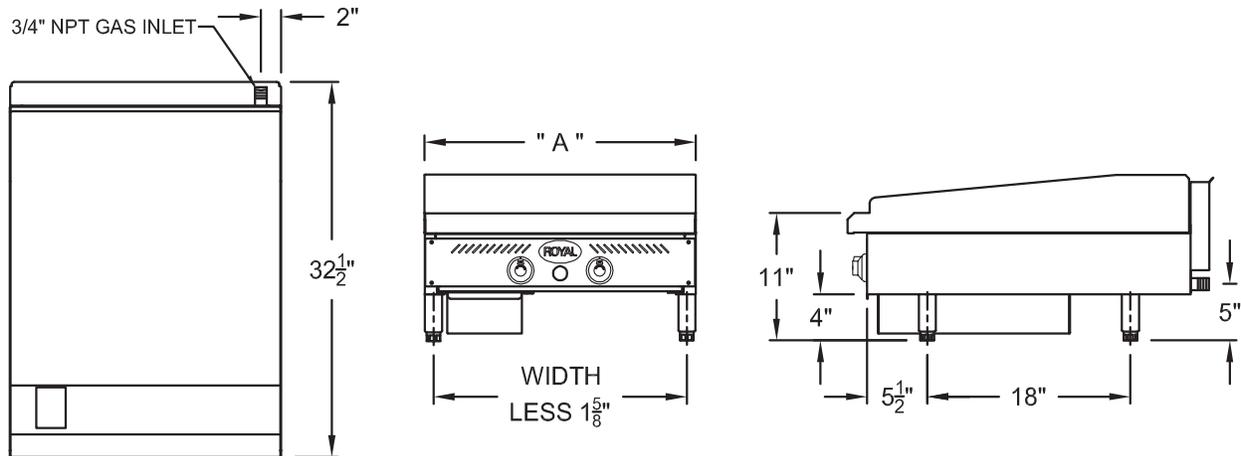

| Model Number | Width (A) | Number of Thermostats | Number of Burners | Total BTU | Ship Weight |
|--------------|-----------|-----------------------|-------------------|-----------|-------------|
| RTG-12 | 12" | 1 | 1 | 30,000 | 145 lbs. |
| RTG-18 | 18" | 1 | 1 | 30,000 | 170 lbs. |
| RTG-24 | 24" | 2 | 2 | 60,000 | 215 lbs. |
| RTG-36 | 36" | 3 | 3 | 90,000 | 300 lbs. |
| RTG-48 | 48" | 4 | 4 | 120,000 | 350 lbs. |
| RTG-60 | 60" | 5 | 5 | 150,000 | 640 lbs. |
| RTG-72 | 72" | 6 | 6 | 180,000 | 745 lbs. |

Notes:

Gas Connection:

3/4" NPT on the right hand rear of the appliance.

The pressure regulator (supplied) is to be connected by the installer.

Specify type of gas and altitude, if over 2,000 feet, when ordering.

Gas Pressure:

| | |
|----------|-------------|
| 5" W.C. | Natural Gas |
| 10" W.C. | Propane |

Clearances:

| | Combustible | Non-Combustible |
|-------|-------------|-----------------|
| Rear | 6" | 0" |
| Sides | 4" | 0" |

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

Royal Range of California, Inc.
 3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600
 Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com