AXIOM-35-3 (2U/1LWarmer)

Height: 19.0" Width: 8.0" Depth: 21.2" (48.3cm) (20.3cm) (53.8cm)





- Adjusts automatically to varying water pressure
- For high lime areas, BrewLOGIC® technology calculates flow rate and adjusts brew time to maintain consistent pot levels
- Cold brew lock-out and automatic warmer time-out ensure high quality, fresh tasting coffee
- · Front of machine programming simplifies installation
- For high lime areas, BrewLOGIC® technology calculates flow rate and adjusts brew time to maintain consistent pot levels
- · Large 200oz. (5.9L) tank provides back-to-back brewing capacity
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- Energy-saver mode reduces tank temperature during idle periods
- Ensures coffee brew quality with cold brew lock out capability
- Hot water faucet
- SplashGard® funnel deflects hot liquids away from the hand
- · Servers not included unless otherwise noted

Agency:

Specifications

Product #: 38700.6001 Faucet: Upper DBC

Water Access: Plumbed Warmers: Two Upper/ One Lower

Finish: Stainless
Funnel: Black Plastic

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
-	-	-	-	-	120	60°F (15.5°C)	-	-	-

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements


	<u> </u>		
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	1/4" Male Flare Fitting	-

CAD Drawings

Additional Features

2D	Revit	KLC			
•					



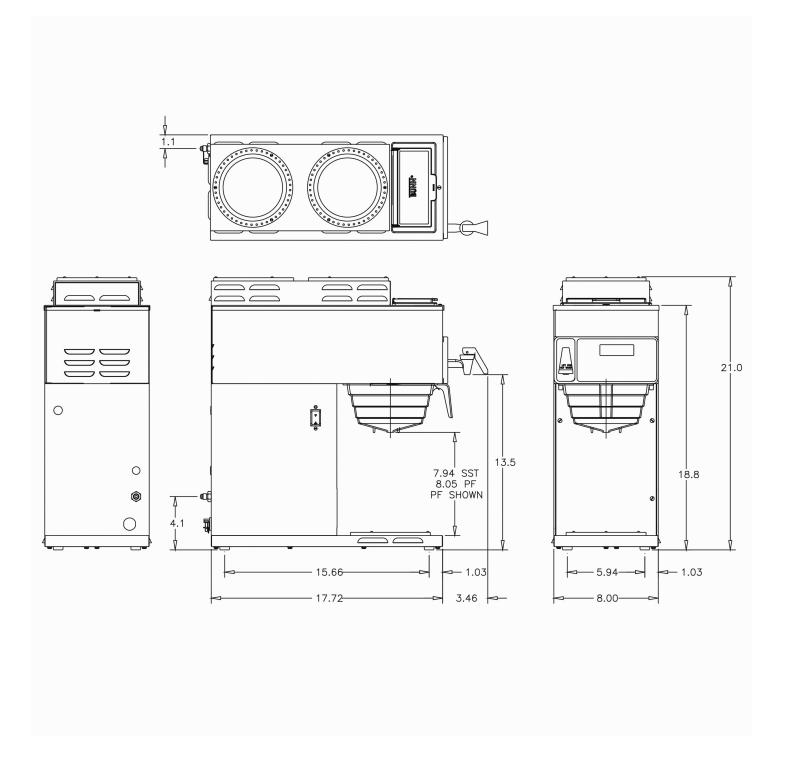

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	19.0 in.	8.0 in.	21.2 in.	23.8 in.	12.5 in.	26.5 in.	-	4.566 ft ³
Metric	48.3 cm	20.3 cm	53.8 cm	60.3 cm	31.8 cm	67.4 cm	-	0.129 m³



Related Products & Accessories: AXIOM-35-3 (2U/1LWarmer)(38700.6001)



STOVE,WX2 120V/200W

Product #: 06310.6000



STOVE,WX1 120V/100W

Product #: 06450.6000





Serving & Holding Options: AXIOM-35-3 (2U/1LWarmer)(38700.6001)



EASY POUR®, (BLK) 1/CS

Product #:06100.0101



EASY POUR®, (BLK) 2/CS

Product #:06100.0102



EASY POUR®, (BLK) 3/CS

Product #:06100.0103



EASY POUR®, (BLK) 6/CS

Product #:06100.0106



EASY POUR®,(BLK) 12/

Product #:06100.0112



EASY POUR®,(BLK) 24/

Product #:06100.0124



EASY POUR,(BLK) 6-1/

Product #:06100.0156



EASY POUR®,(ORN) 1/

Product #:06101.0101



EASY POUR®,(ORN) 2/ CS

Product #:06101.0102



EASY POUR®,(ORN) 3/

Product #:06101.0103



EASY POUR®,(ORN) 6/

Product #:06101.0106



EASY POUR,(ORN) 12/ CS

Product #:06101.0112



EASY POUR®,(ORN) 24/ CS

Product #:06101.0124



DECANTER,GLASS-BLK 12C 24/CS

Product #:42400.0024



DECANTER,GLASS-BLK 12CUP 1PK

Product #:42400.0101



DECANTER,GLASS-BLK 12C 3/CS

Product #:42400.0103



DECANTER,GLASS-ORN 12C 24/CS

Product #:42401.0024



DECANTER, GLASS-ORN 12 CUP 1PK

Product #:42401.0101



DECANTER,GLASS-ORN 12C 3/CS

Product #:42401.0103

