



ATV | VACUUM BAGS

ATMOVAC **ATV** series vacuum bags are constructed of a seven-layer coextruded film with a minimum of 20% nylon. Made for use in commercial foodservice/production operations, they come in both smooth and channeled styles and can be used for:

**storing • extending shelf life • portion control
sous-vide cooking • rapid freezing • rethermalizing**

SMOOTH

Chamber vacuum machines

CHANNELED

External & Chamber vacuum machines

TOTAL THICKNESS

3.5 mil / 90 µm

HEAT SEAL STRENGTH

2.04 kg/cm (11.42 lbs/in)

O₂

OXYGEN TRANSMISSION RATE

2.00 cc/100 in 2/24 hrs

H₂O

MOISTURE TRANSMISSION RATE

0.129 g/100 in 2/24 hrs

TEMPERATURE RANGE


-20 to 221°F

-30 to 105°C




ATV | VACUUM BAGS


7 layers



**Greater oxygen barrier
than regular 3 mil bags**



**Premium coextrusion
New technology ensuring balanced
breathability & moisture retention**

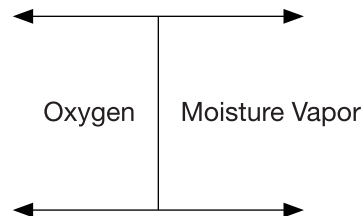

MADE IN P.R.C

The information and suggestions contained herein represent the best information available and we believe them to be reliable. They should not, however, be construed as controlling and are presented without guarantee of performance either express or implied. We urge purchasers to conduct confirmatory tests to determine final suitability for their specific end uses. No statement with respect to use is intended as a positive recommendation for such use and no warranty with respect to infringement of patents held by others is made or intended.