

## Thermal Server Coffee Brewer

### Features

#### Thermal Server Coffee Brewer

- Brews 3.8 gallons (14.4 litres) of perfect coffee per hour.
- Convenient thermal servers keep coffee hot and fresh for hours.
- Thermal servers are easily transported to remote meeting rooms, breakfast bars, etc.
- Pourover model available (CW15-TS).
- Pourover feature included on automatic models.
- Internal components are constructed from stainless steel.
- Hot water faucet available.
- SplashGard® funnel deflects hot liquids away from the hand.
- Holds up to 4" cup.



**Model CWTF TS\***  
**with Thermal Server**  
*(Thermal Server not included)*  
 Dimensions: 27.6" H x 9" W x 18.5" D  
 (70.1cm H x 22.9cm W x 47cm D)

For current specification sheets and other information, go to [www.bunn.com](http://www.bunn.com).

\* International models may vary in appearance.

### Related Products

**Easy Clear® EQ-17-TL**  
 Product No. : 30200.1000  
 Dimensions:  
 12<sup>7</sup>/<sub>16</sub>" H x 2<sup>1</sup>/<sub>2</sub>" W x 3" D  
 31.6 cm H x 6.35 cm W x 7.62 cm D



**Easy Clear® ED-17-TL**  
 Product No. : 30201.1001  
 Dimensions:  
 8<sup>1</sup>/<sub>4</sub>" H x 2<sup>5</sup>/<sub>16</sub>" Dia.  
 20.95 cm H x 5.87 cm Dia.



**Paper Filter Pack**  
 Product No. : 20115.0000  
 Packed per case: 1,000  
 Dimensions:  
 4<sup>1</sup>/<sub>4</sub>" Base x 2<sup>3</sup>/<sub>4</sub>" Sidewall  
 10.8 cm Base x 6.98 cm Sidewall



**Thermal Server Booster\***  
 Product No. : 18010.6000  
 Capacity: 1 Thermal Server  
 Shipping Weight: 2 lbs.  
 Dimensions: 6" H x 9<sup>1</sup>/<sub>4</sub>" W x 8<sup>1</sup>/<sub>4</sub>" D  
 15.2 cm H x 23.5 cm W x 21 cm D



**Thermal Server-Black**  
 Product No. : 23300.0007  
 Capacity: 84 oz. (2.5 L)



\*To be used in conjunction with Thermal Server without base. Product No. : 23300.0010 & 23300.0006

Model	Agency Listing
CW TS	UL NSF
CWT TS	UL NSF
CWTF TS	UL NSF

## Dimensions & Specifications



Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Cu. Ft.	Shipping Weight	Cord Attached
CW15-TS (Pourover)	23000.0000	120	11.4	1320	1370	3.8 gal./hr.	7.3	27 lbs.	Yes†
CWT15-TS (Automatic)	23000.0003	120	11.4	1320	1370	3.8 gal./hr.	7.3	29 lbs.	Yes†
CWTF15-TS (Automatic)*	23000.0006	120	11.4	1320	1370	3.8 gal./hr.	7.3	32 lbs.	Yes†

\*Includes faucet. †Power cord (NEMA 5-15P) 15 Amp-120V machine only.

**Brewing capacity:** based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Electrical: 2-wires plus ground service rated 120V, single phase, 60Hz.

Plumbing: 20-90 psi (138-621 kPa). Supplied with 1/4" (6.4 mm) male flare fitting.

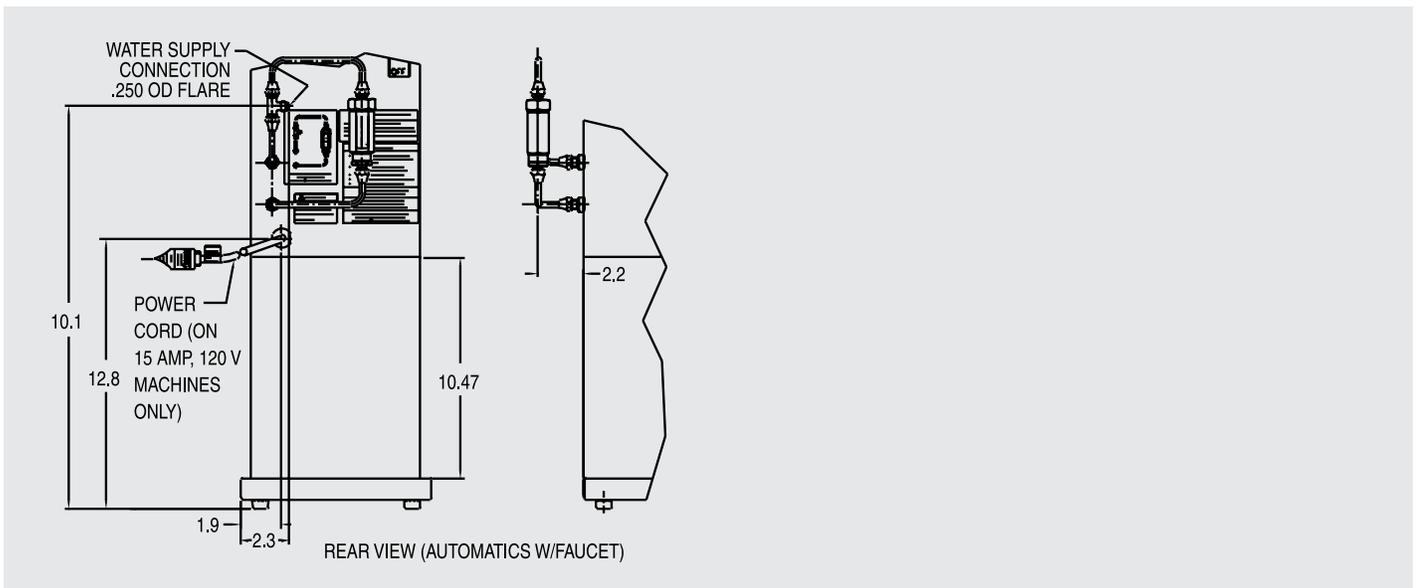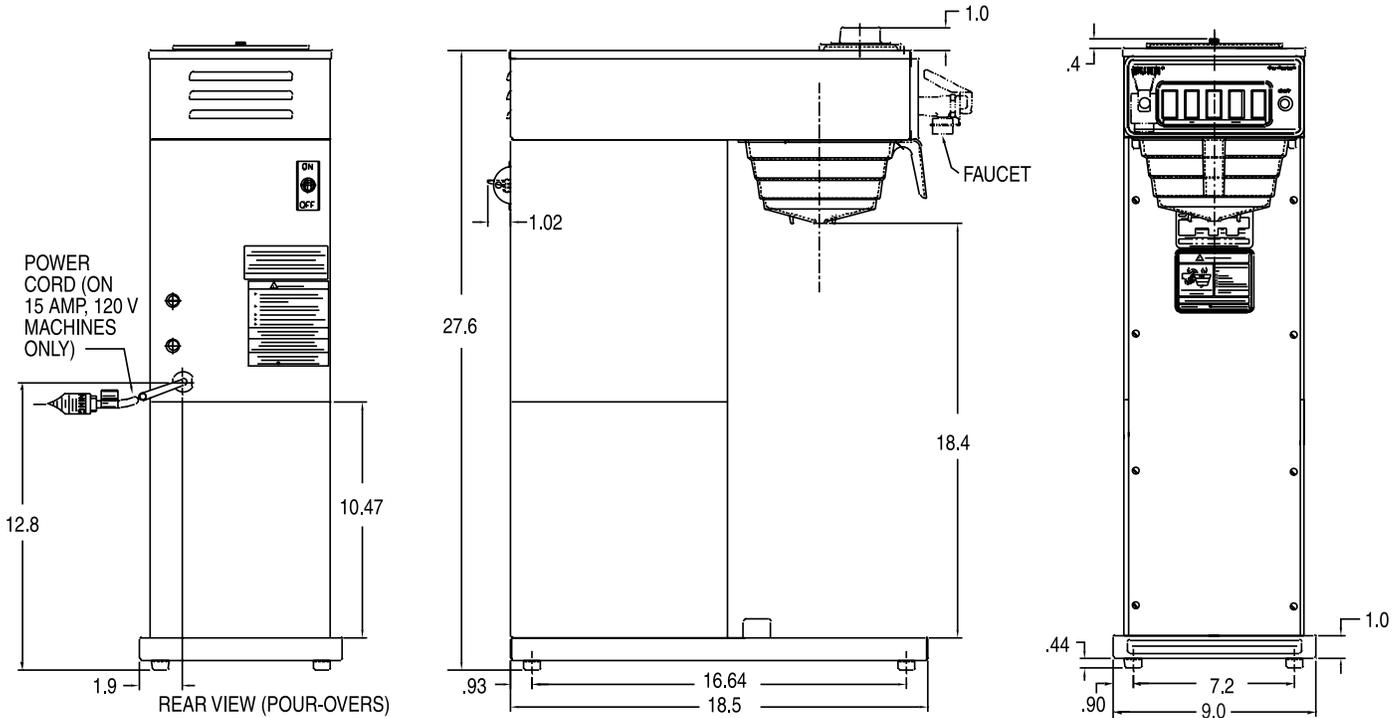

BUNN Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.