

RO-GCG

Gas Countertop Griddle

□ RO-GCG-18	□ RO-GCG-24	□ RO-GCG-36	
	□ RO-GCG-24-CP	□ RO-GCG-36-CP	







Option

☐ RO-ACC-4LEG - Set of 4" (102 mm) Adjustable Legs

Construction

- Made of grade 430 stainless steel
- 1/2" (13 mm) thick polished steel cooking plate
- Optional chrome plated griddle for 24" (610 mm) and 36" (914 mm) plate models
- 3" (77 mm) high splash guards on three (3) sides
- Removable grease pan drawer
- 1" (25 mm) adjustable stainless steel feet

Operation

- All models offer a propane or natural gas power supply:
- Factory assembled for a natural gas installation, including a pressure regulator
- Propane conversion kit included
- Power conversion must be completed by a certified technician
- Power outputs from 20 000 to 60 000 BTU/H available depending on the model
- Thermostatic control of temperature from 100 °F to 450 °F (38 °C to 232 °C)
- 1/2" (13 mm) NPT gas connector

Legal


- All models require a 6" (152 mm) clearance on both sides as well as behind the unit if next to combustible material
- All models require commercial installation and are not intended for residential use
- One (1) year limited warranty on parts and labor
- Certified to ANSI Z83.11b/CSA 1.8b-2009 standards










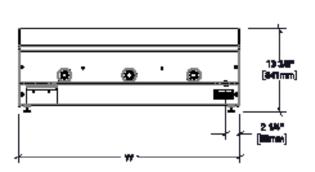

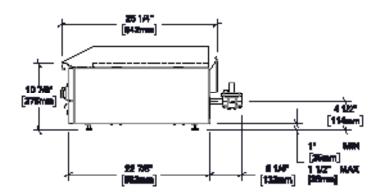

Model	Width (W)	Depth	Total height	Cooking surface	Weight	Shipping dimensions (W x D x H)
RO-GCG-18	18" – 457 mm	25¼" – 642 mm	13%" – 341 mm	17½ x 19" 445 x 483 mm	95 lb – 43 kg	30 x 20 x 27" 762 x 508 x 686 mm
RO-GCG-24	24" – 610 mm			23½ x 19" 597 x 483 mm	130 lb – 59 kg	38 x 38 x 24" 965 x 965 x 610 mm
RO-GCG-24-CP	24 -010111111					
RO-GCG-36	36" – 914 mm			35½ x 19" 902 x 483 mm	190 lb – 86 kg	40 x 30 x 24" 1016 x 762 x 610 mm
RO-GCG-36-CP	30 - 914111111					
Model	Total output	Number of controls / burners	Natural gas operating pressure	Propane gas operating pressure	Polished steel cooking plate	Chrome plated steel cooking plate (Option CP)
Model RO-GCG-18	Total output 20 000 BTU/H					cooking plate
	20 000 BTU/H	controls / burners			cooking plate	cooking plate
RO-GCG-18	•	controls / burners			cooking plate	cooking plate
RO-GCG-24	20 000 BTU/H	controls / burners	operating pressure	operating pressure	cooking plate	cooking plate (Option CP)